EMC TEST REPORT	
Testing Laboratory	
Name..... :	Shenzhen CTG tesing co.,ltd
Address..... :	3/F, Yongxing Plastic Plant, No. 11 Waihuan Road,Shiyan street, Bao'an District, Shenzhen,China
Testing location..... :	Shenzhen CTG tesing co.,ltd
Date of issue	2025-07-15
Applicant	
name..... :	SHENZHEN JAKA TECHNOLOGY CO.,LTD
Address..... :	2806A FUJIZHIDI BUILDING,LONGGANG AVENUE,LONGGANG DISTRICT,SHENZHEN
Test specification:	
Standard.....:	EN IEC 61000-6-3:2021 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A1:2019/A2:2021 EN 61000-6-1:2019
Test procedure..... :	Type Test
Non-standard test method……..:	N/A
Test item	
Description..... :	Lithium iron phosphate battery
Model and/or type reference..... :	JA-LF51.2V410AH
Additional model.....:	JA-LF51.2V250A;JA-LF51.2V130AH;JA-LF51.2V100AH; JA-LF51.2V280AH;JA-LF51.2V314AH;JA-LF51.2V340AH; JA-LF51.2V230AH;JA-LF12.8V100AH;JA-LF51.2V320AH
Trademark .....:	JAKA Solar
Manufacturer ..... :	SHENZHEN JAKA TECHNOLOGY CO.,LTD
Address …….:	2806A FUJIZHIDI BUILDING,LONGGANG AVENUE,LONGGANG DISTRICT,SHENZHEN
Test sample(s) received	2025-07-08
Test in period	2025-07-08- 2025-07-15
Test item particulars	
Classification of installation and use:	N/A
Supply Connection.....:	N/A
Possible test case verdicts	
- test case does not apply to the test object :	N(.A)
- test object does meet the requirement :	P(Pass)
- test object does not meet the requirement :	F(Fail)

Summary of testing:

The product has been tested according to standard
EN IEC 61000-6-3:2021
EN IEC 61000-3-2:2019/A1:2021
EN 61000-3-3:2013/A1:2019/A2:2021
EN 61000-6-1:2019

- Tests performed on the bench
- Maximum ambient temperature: +25℃
- Tested for moderate conditions

Prepared by : Gloria
Engineer

Reviewer :
Supervisor

Approved & Authorized Signer :
Manager

TABLE OF CONTENTS

TABLE OF CONTENTS **2**
TEST REPORT DECLARATION **5**
1. TEST RESULTS SUMMARY **5**
2. GENERAL INFORMATION **6**
2.1. Report information 6
2.2. Measurement Uncertainty 6
3. PRODUCT DESCRIPTION **7**
3.1. EUT Description 7
3.2. Block Diagram of EUT Configuration 7
3.3. Operating Condition of EUT 7
3.4. Test Conditions 7
3.5. Modifications 7
3.6. Abbreviations 8
3.7. Performance Criterion 8
4. TEST EQUIPMENT USED **9**
4.1. For Conducted Emission Test 9
4.2. For Radiated Emission Measurement 9
4.3. For Harmonic / Flicker Test 9
4.5. For RF Strength Susceptibility Test 9
4.7. For Surge Test 10
4.9. For Magnetic Field Immunity Test 10
5. POWER LINE CONDUCTED EMISSION TEST **11**
5.1. Block Diagram of Test Setup 11
5.2. Test Standard 11
5.3. Power Line Conducted Emission Limit 11
5.4. EUT Configuration on Test 11
5.5. Operating Condition of EUT 11
5.6. Test Procedure 12
5.7. Test Result 12
6. RADIATED EMISSION TEST **13**
6.1. Setup Diagram 13
0.8 METER 13
6.2. Test Standard 13
6.3. Radiated Emission Limit 13
6.4. EUT Configuration on Test 14
6.5. Operating Condition of EUT 14
6.6. Test Procedure 14
6.7. Test Results 14
7. HARMONIC CURRENT EMISSION TEST **15**
7.1. Block Diagram of Test Setup 15
7.2. Test Standard and Limit 15
7.3. Test Procedure 15
7.4. Test Results 15
8. VOLTAGE FLUCTUATIONS & FLICKER TEST **16**
8.1. Block Diagram of Test Setup 16
8.2. Test Standard 16
8.3. Operating Condition of EUT 16
8.4. Test Results 16
9. ELECTROSTATIC DISCHARGE TEST **17**
9.2. Test Standard 17
9.4. EUT Configuration on Test 17
9.5. Operating Condition of EUT 17
9.6. Test Procedure 18
9.7. Test Results 18

Electrostatic Discharge Test Results 19
10. RF FIELD STRENGTH SUSCEPTIBILITY TEST **20**
10.1. R/S Test Setup 20
10.2. Test Standard 20
10.4. EUT Configuration on Test 21
10.5. Operating Condition of EUT 21
10.6. Test Procedure 21
2. Radiated Signal Modulated **21**
5. Dwell Time 1 Sec. **21**
10.7. Test Results 21
RF Field Strength Susceptibility Test Results 22
11. ELECTRICAL FAST TRANSIENT/BURST TEST **23**
11.1. EFT Test Setup 23
11.2. Test Standard 23
11.4. EUT Configuration on Test 23
11.5. Operating Condition of EUT 23
11.6. Test Procedure 24
11.7. Test Results 24
12. SURGE TEST **26**
12.1. Surge Test Setup 26
12.2. Test Standard 26
12.4. EUT Configuration on Test 26
12.5. Operating Condition of EUT 26
12.6. Test Procedure 26
12.7. Test Results 27
13. INJECTED CURRENTS SUSCEPTIBILITY TEST **29**
13.2. Test Standard 29
13.4. EUT Configuration on Test 29
13.5. Operating Condition of EUT 29
13.6. Test Procedure 30
13.7. Test Results 30
14. VOLTAGE DIPS AND INTERRUPTIONS TEST **32**
14.2. Test Standard 32
14.4. EUT Configuration on Test 32
14.5. Operating Condition of EUT 32
14.6. Test Procedure 33
14.7. Test Result 33
APPENDIX I **35**
APPENDIX II **38**

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Radiated Emission	PASS
Conducted Disturbance	PASS
Harmonic Current	PASS
Voltage Fluctuation and Flicker	PASS
Electrostatic Discharge Immunity	PASS
Radiated Electromagnetic Fields Immunity	PASS
Electric Fast Transient Burst Immunity	PASS
Surge Immunity	PASS
Injected currents susceptibility test	PASS
Voltage dips and interruptions Immunity	PASS

2. GENERAL INFORMATION

2.1. Report information

2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that CTG approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that CTG in any way guarantees the later performance of the product/equipment.

2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, CTG therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through CTG, unless the applicant has authorized CTG in writing to do so.

2.2. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	**Uncertainty**
Uncertainty for Radiation emission test (30MHz to 1GHz)	4.0dB

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description	:	Lithium iron phosphate battery
Applicant	:	SHENZHEN JAKA TECHNOLOGY CO.,LTD 2806A FUJIZHIDI BUILDING,LONGGANG AVENUE,LONGGANG DISTRICT,SHENZHEN
Manufacturer	:	SHENZHEN JAKA TECHNOLOGY CO.,LTD 2806A FUJIZHIDI BUILDING,LONGGANG AVENUE,LONGGANG DISTRICT,SHENZHEN
Model Number	:	JA-LF51.2V410AH JA-LF51.2V250A;JA-LF51.2V130AH;JA-LF51.2V100AH; JA-LF51.2V280AH;JA-LF51.2V314AH;JA-LF51.2V340AH; JA-LF51.2V230AH;JA-LF12.8V100AH;JA-LF51.2V320AH (Note: The series products have the same circuit diagram, PCB layout and functionality. The differences are the model name and appearance, so, we select, JA-LF51.2V410AH to test.)

3.2. Block Diagram of EUT Configuration



3.3. Operating Condition of EUT

Test mode 1: ON

3.4. Test Conditions

Temperature: 23-26℃
Relative Humidity: 55-68 %

3.5. Modifications

No modification was made.

3.6. Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

3.7. Performance Criterion

Criterion A: The equipment shall continue to operate as intended without operator intervention. No degradation of performance of loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

Criterion B: After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

Criterion C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

4. TEST EQUIPMENT USED

4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	Sep. 20, 24	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	Sep. 20, 24	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	Sep. 20, 24	1 Year
4.	Conical	Emtek	N/A	N/A	N/A	N/A
5.	Voltage Probe	Schwarzbeck	TK9416	N/A	Sep. 20, 24	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6100214550	Sep. 20, 24	1 Year

4.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	Sep. 20, 24	1 Year
2.	Test Receiver	Rohde&Schwarz	ESC830	828982/018	Sep. 20, 24	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	Sep. 20, 24	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	Sep. 20, 24	1 Year
5.	Cable	Schwarzbeck	AK9513	ACRX1	Sep. 20, 24	1 Year
6.	Cable	Rosenberger	N/A	FR2RX2	Sep. 20, 24	1 Year
7.	Cable	Schwarzbeck	AK9513	CRRX2	Sep. 20, 24	1 Year
8.	Cable	Schwarzbeck	AK9513	CRRX2	Sep. 20, 24	1 Year
9.	Signal Generator	HP	864A	3625U00573	Sep. 20, 24	1 Year

4.3. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Harmonic and Flicker analyzer	Laplace	AC2000A	309709	Sep. 20, 24	1 Year

4.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PSD 1600	H911’292	Sep. 20, 24	1 Year

4.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	Sep. 20, 24	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	Sep. 20, 24	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

4.6. For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval

1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	Sep. 20, 24	1 Year

4.7. For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	Sep. 20, 24	1 Year

4.8. For Injected Currents Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	Sep. 20, 24	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	Sep. 20, 24	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	Sep. 20, 24	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	Sep. 20, 24	1 Year
5.	Attenuator	EMTEST	ATT6	0010222a	Sep. 20, 24	1 Year

4.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	Sep. 20, 24	1 Year

4.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Dips Tester	HEAFELY	PLINE 1610	083732-18	Sep. 20, 24	1 Year

5. POWER LINE CONDUCTED EMISSION TEST

5.1. Block Diagram of Test Setup

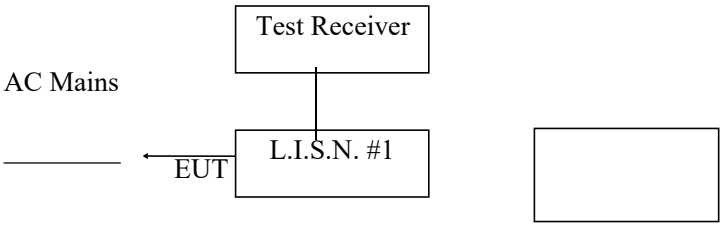

5.2. Test Standard

EN IEC 61000-6-3:2021

5.3. Power Line Conducted Emission Limit

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN61000-6-3 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

5.4.1. EUT Information

Model Number : JA-LF51.2V410AH

Serial Number : JA-LF51.2V250A;JA-LF51.2V130AH;JA-LF51.2V100AH;JA-LF51.2V280AH;JA-LF51.2V314AH;JA-LF51.2V340AH;JA-LF51.2V230AH;JA-LF12.8V100AH;JA-LF51.2V320AH

Manufacturer : SHENZHEN JAKA TECHNOLOGY CO.,LTD

5.5. Operating Condition of EUT

5.5.1. Setup the EUT and simulators as shown in Section 5.1.

5.5.2.Turn on the power of all equipments.

5.5.3.Let the EUT work in test modes (ON) and test it.

5.6. Test Procedure

The EUT is put on the ground and connected to the AC mains through a Artificial Mains Network (AMN). This provided 50ohm-coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the EN61000-6-3 regulations during conducted emission test.

The bandwidth of the test receiver is set at 9kHz.


The frequency range from 150 kHz to 30 MHz is investigated.

5.7. Test Result

PASS

6. RADIATED EMISSION TEST

6.1. Setup Diagram

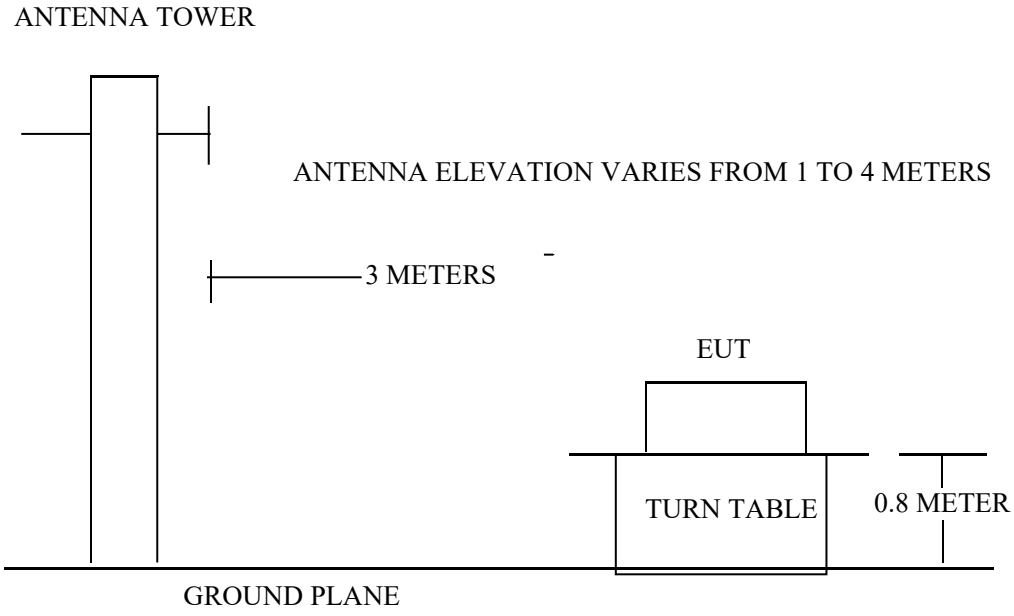

6.2. Test Standard

EN IEC 61000-6-3:2021

6.3. Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dBμV/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note:(1) The tighter limit shall apply at the edge between two frequency bands.
(2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

6.4. EUT Configuration on Test

The EN61000-6-3 Class B regulations test method must be used to find the maximum emission during radiated emission test.

6.5. Operating Condition of EUT

6.5.1. Setup the EUT as shown on Section 6.1.

6.5.2.Turn on the power of all equipments.

6.5.3.Let the EUT work in test mode(On) and measure it.

6.6. Test Procedure


The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 de/s to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.
The bandwidth setting on the test receiver is 120 KHz.
The EUT is tested in Semi-Anechoic Chamber. and all the scanning waveform is put in **Appendix I.**

6.7. Test Results

PASS.

7. HARMONIC CURRENT EMISSION TEST

7.1. Block Diagram of Test Setup

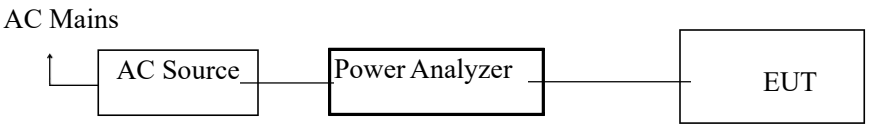

7.2. Test Standard and Limit

7.2.1. Test Standard

EN IEC 61000-3-2:2019/A1:2021

7.2.2. Limits

Table 12 Harmonic Current Test Limit (Class A)

Harmonic order (**n**)	Maximum permissible harmonic current (A)
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
15≤n≤39	0.15×15/**n**
Even harmonics	
2	1.08
4	0.43
6	0.30
8≤n≤40	0.23×8/**n**

7.3. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

7.4. Test Results

PASS

8. VOLTAGE FLUCTUATIONS & FLICKER TEST

8.1. Block Diagram of Test Setup

Same as Section 7.1..

8.2. Test Standard

EN61000-3-3:2013/A1:2019/A2:2021

8.3. Operating Condition of EUT

Same as Section7.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test.

Flicker Test Limit


Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

8.4. Test Results

PASS

9. ELECTROSTATIC DISCHARGE TEST

9.1. Block Diagram of ESD Test Setup

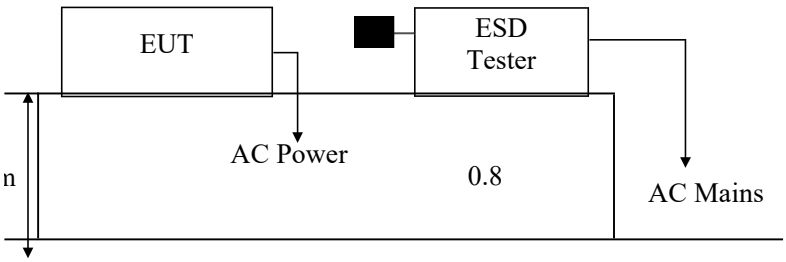

9.2. Test Standard

Remark: is Discharge Electrode

EN 61000-6-1:2007 (EN61000-4-2:2009)
Severity Level 3 for Air Discharge at 8KV
Severity Level 2 for Contact Discharge at 4KV

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

9.3.2. Performance criterion: B

9.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

9.5. Operating Condition of EUT

9.5.1. Setup the EUT as shown in Section 9.1.

9.5.2.Turn on the power of all equipments.

9.5.3.Let the EUT work in test mode (on) and test it.

9.6. Test Procedure

9.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.
After each discharge, the discharge electrode shall be removed from the EUT.
The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.6.2. Contact Discharge:

All the procedure shall be same as Section 9.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

9.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.7. Test Results

PASS.

Please refer to the following page.

Electrostatic Discharge Test Results

Applicant	: SHENZHEN JAKA TECHNOLOGY CO.,LTD	Test Date	: July.14,2025
EUT	: Lithium iron phosphate battery	Temperature	: 24.3℃
M/N	: JA-LF51.2V410AH	Humidity	: 50％
Power Supply	: 51.2V,200A,410Ah	Test Mode	: on

Air Discharge: ±8KV For each point positive 10 times and negative 10 times discharge.


Contact Discharge: ±4KV

Location		Kind A-Air Discharge C-Contact Discharge	Result
Slots	10points	A	PASS
Metal	10points	---	---
HCP	8points	C	PASS
VCP	8points	C	PASS

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

10. RF FIELD STRENGTH SUSCEPTIBILITY TEST

10.1. R/S Test Setup

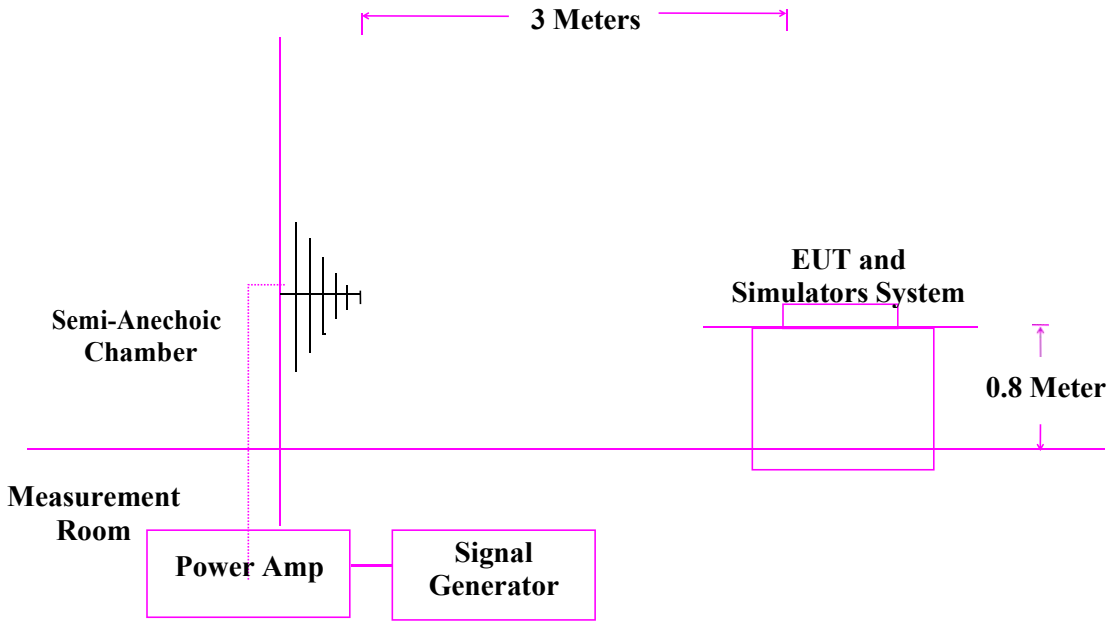

10.2. Test Standard

EN 61000-6-1:2007 (EN 61000-4-3:2006 + A1:2008 + A2:2010)
Severity Level 2 at 3V / m

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

10.3.2. Performance criterion : A

10.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

10.5. Operating Condition of EUT

Setup the EUT as shown in Section 10.1.. The operating condition of EUT are listed in section 3.3.

10.6. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.
In order to judge the EUT performance, a CCD camera is used to monitor the EUT.
All the scanning conditions are as follows **:**

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 1000 MHz, 1.4GHz-2.7GHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	1 Sec.

10.7. Test Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Applicant	:	SHENZHEN JAKA TECHNOLOGY CO.,LTD	Test Date	:	July.14,2025
EUT	:	Lithium iron phosphate battery	Temperature	:	24.3 ℃
M/N	:	JA-LF51.2V410AH	Humidity	:	50 %
Power Supply	:	51.2V,200A,410Ah	Test Mode	:	on
Frequency Range :		80 MHz to 1000 MHz, 1.4GHz-2.7GHz			


Modulation: ☑AM ☐Pulse ☐none 1 KHz 80%

Criterion : A

	Frequency Rang : 80-1000	
Steps	1%	1%
	Horizontal	Vertical
Front	Pass	Pass
Right	Pass	Pass
Rear	Pass	Pass
Left	Pass	Pass

11. ELECTRICAL FAST TRANSIENT/BURST TEST

11.1. EFT Test Setup

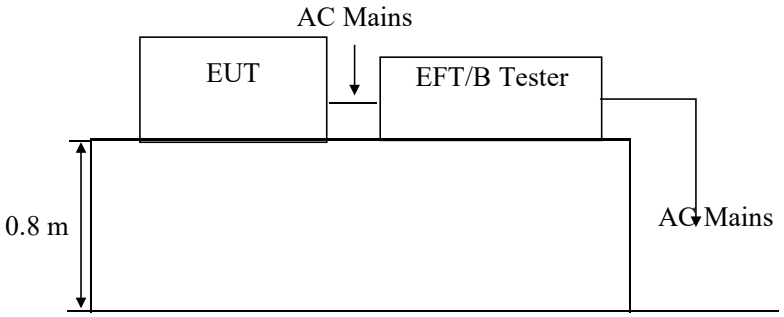

11.2. Test Standard

EN 61000-6-1:2007 (EN61000-4-4:2012)
Severity Level 2 at 1KV

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

Open Circuit Output Test Voltage ±10%		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

11.3.2. Performance criterion : B

11.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

11.5. Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.

11.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

11.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

11.6.2. For signal lines and control lines ports:

It’s unecessary to test.

11.6.3. For DC output line ports:

It’s unnecessary to test.

11.7. Test Results

PASS

Electrical Fast Transient/Burst Test Results


Applicant :	*SHENZHEN JAKA TECHNOLOGY CO.,LTD*	*Test Date :*	*July.14,2025*
EUT :	*Lithium iron phosphate battery*	*Temperature :*	*24.3℃*
M/N :	JA-LF51.2V410AH	*Humidity :*	*50％*
Power Supply :	*51.2V,200A,410Ah*	*Test Mode :*	*on*

Inject Place : AC Mains

Inject Line	*Voltage KV*	*Inject Time(s)*	*Inject Method*	*Results*	*Inject Line*	*Voltage KV*	*Inject Time(s)*	*Inject Method*	*Results*
L	*±1*	*120*	*Direct*	*Pass*					
N	*±1*	*120*	*Direct*	*Pass*					
L N	*±1*	*120*	*Direct*	*Pass*					

12. SURGE TEST

12.1. Surge Test Setup

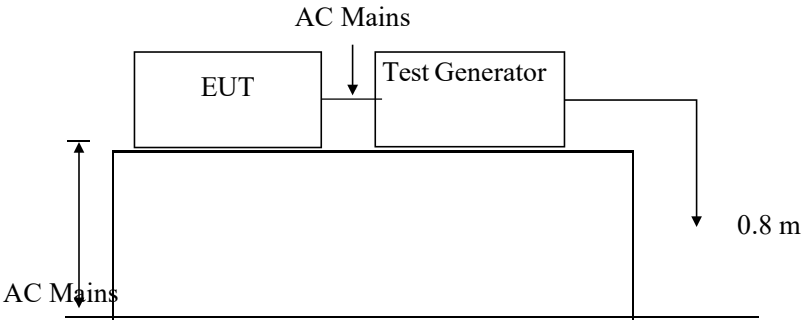

12.2. Test Standard

EN 61000-6-1:2007 (EN61000-4-5:2014/A1:2017)
Severity Level 2 for Line to Neutral at 1.0KV

12.3. Severity Levels and Performance Criterion

12.3.1. Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

Performance criterion **: B**

12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

12.5. Operating Condition of EUT

12.5.1. Setup the EUT as shown in Section 12.1..

12.5.2.Turn on the power of all equipments.

12.5.3.Let the EUT work in test mode (on) and test it.

12.6. Test Procedure

1) Setup the EUT and test generator as shown on Section 12.1.
2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
4) Different phase angles are done individually.
5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7. Test Results

PASS


Surge Immunity Test Results

Applicant :	SHENZHEN JAKA TECHNOLOGY CO.,LTD	Test Date :	July.14,2025
EUT :	Lithium iron phosphate battery	Temperature :	24.3℃
M/N :	JA-LF51.2V410AH	Humidity :	50%
Power Supply :	51.2V,200A,410Ah	Test Mode :	On

Location	Polarity	Phase Angle	No of Pulse	Pulse Voltage (KV)	Result
L-N	+	0	5	1.0	Pass
	+	90	5	1.0	Pass
	+	180	5	1.0	Pass
	+	270	5	1.0	Pass
	-	0	5	1.0	Pass
	-	90	5	1.0	Pass
	-	180	5	1.0	Pass
	-	270	5	1.0	Pass

13. INJECTED CURRENTS SUSCEPTIBILITY TEST

13.1. Block Diagram of Test AC Mains Setup

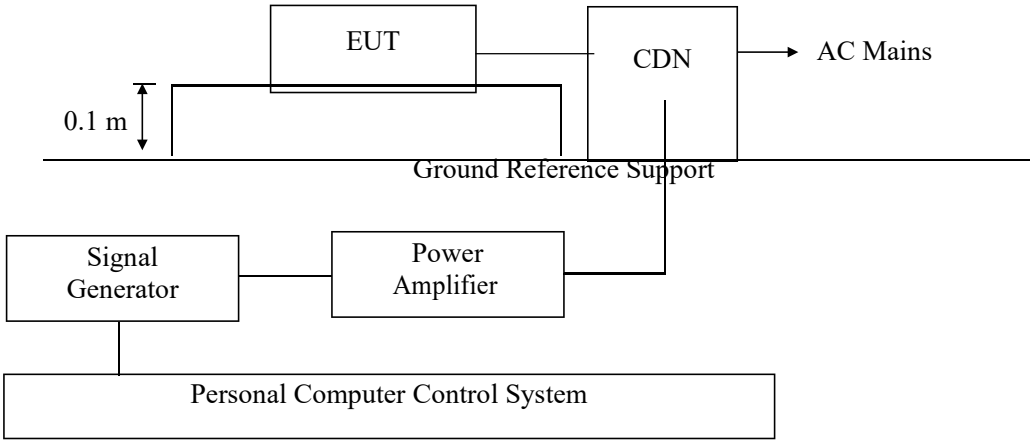

13.2. Test Standard

EN 61000-6-1:2007 (EN61000-4-6:2014/AC:2015)
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

13.3. Severity Levels and Performance Criterion

13.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

13.3.2. Performance criterion: A

13.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2

13.5. Operating Condition of EUT

Setup the EUT as shown in Section 13.1.. The operating condition of EUT are listed in section 3.3

13.6. Test Procedure

1) Set up the EUT, CDN and test generators as shown on Section 13.1.
2) Let the EUT work in test mode and test it.
3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
4) The disturbance signal described below is injected to EUT through CDN.
5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
7) The rate of sweep shall not exceed $1.5*10^{-3}$decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.7. Test Results

PASS


Injected Currents Susceptibility Test Results

Applicant	:	*SHENZHEN JAKA TECHNOLOGY CO.,LTD*	*Test Date*	:	*July.14,2025*
EUT	:	*Lithium iron phosphate battery*	*Temperature*	:	*24.3℃*
M/N	:	JA-LF51.2V410AH	*Humidity*	:	*50%*
Power Supply	:	*51.2V,200A,410Ah*	*Test Mode*	:	*on*

Frequency Range (MHz)	*Injected Position*	*Strength*	*Criterion*	*Result*
0.15 ~ 20	*AC Line*	*3V(rms), Unmodulated*	*A*	*Pass*
20 ~ 80	*AC Line*	*3V(rms), Unmodulated*	*A*	*Pass*

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Voltage Dips and Interruptions Test Setup

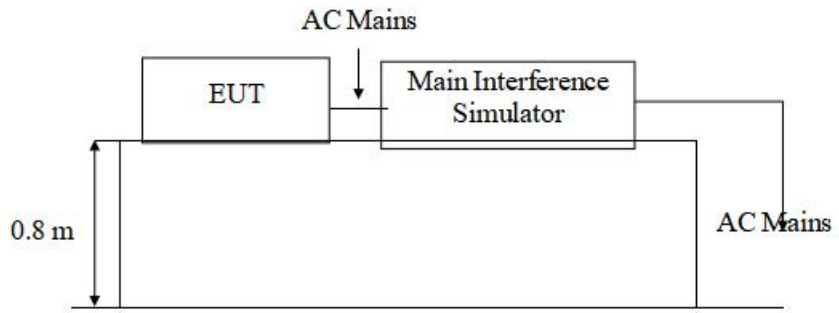

Remark: Combination wave generator and decoupling network are included in test generator.

14.2. Test Standard

EN 61000-6-1:2007 (EN61000-4-11:2020)

14.3. Severity Levels and Performance Criterion

14.3.1. Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	250p
40	60	5p
70	30	0.5p

14.3.2. Performance criterion : C & B

14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

14.5. Operating Condition of EUT

14.5.1. Setup the EUT as shown in Section 14.1.

14.5.2.Turn on the power of all equipments.

14.5.3.Let the EUT work in test mode (SPEAKERS Playing) and test it.

14.6. Test Procedure

1) Set up the EUT and test generator as shown on Section 14.1.
2) The interruptions is introduced at selected phase angles with specified duration.
3) Record any degradation of performance.

14.7. Test Result

PASS


Voltage Dips And Interruptions Test Results

Applicant :	SHENZHEN JAKA TECHNOLOGY CO.,LTD	Test Date :	July.14,2025
EUT :	Lithium iron phosphate battery	Temperature :	24.3℃
M/N :	JA-LF51.2V410AH	Humidity :	50%
Power Supply :	51.2V,200A,410Ah	Test Mode :	on

Test Level % U_T	Voltage Dips & Short Interruptions % U_T	Duration (in period)	Phase Angle	Criterion	Result
0	100	250P	0°~360°	C	Pass
40	60	5P	0°~360°	C	Pass
70	30	0.5P	0°~360°	B	Pass

APPENDIX I

EUT:	Lithium iron phosphate battery	Model No.:	JA-LF51.2V410AH
Temperature:	24.3℃	Relative Humidity:	58%
Test Power:	*51.2V,200A,410Ah*	Test Result:	Pass
Test Mode:	ON		

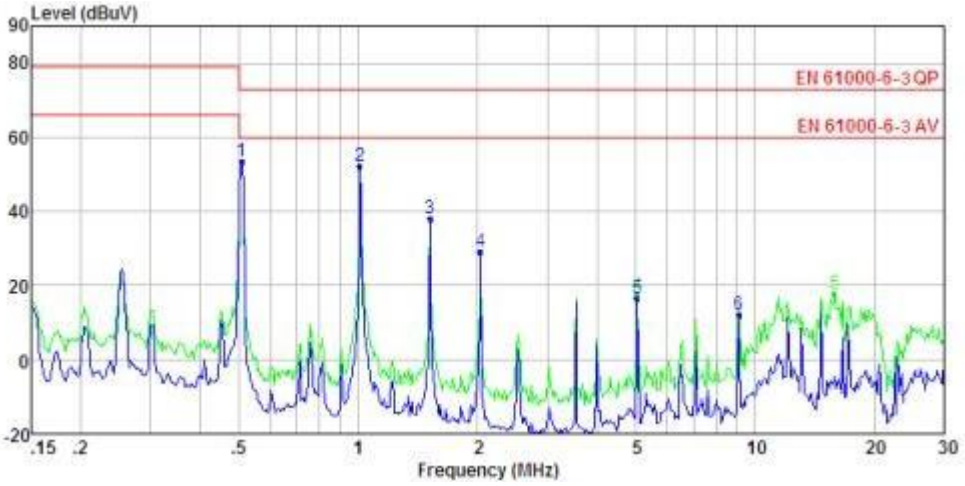


	Freq	Level	Margin	Limit	Reading	Correct	Remark
	MHz	dBu/m	dB	(dBuA/m)	(dBuA/m)	Factor(dB)	
1	48.4300	19.45	-20.55	40.00	2.30	10.67	
2	115.3600	11.69	-28.31	40.00	-2.51	12.58	
3	163.8600	14.54	-25.46	40.00	4.76	13.55	
4	212.3600	13.23	-26.77	40.00	0.35	13.18	
5	291.9000	21.39	-25.61	47.00	1.61	19.58	

Note: '*' means the disturbance power level 20dB lower than the relevant limit.

QP Level = QP Reading + Cable Loss

EUT:	Lithium iron phosphate battery	Model No.:	JA-LF51.2V410AH
Temperature:	24.3℃	Relative Humidity:	58%
Test Power:	*51.2V,200A,410Ah*	Test Result:	Pass
Test Mode:	ON		

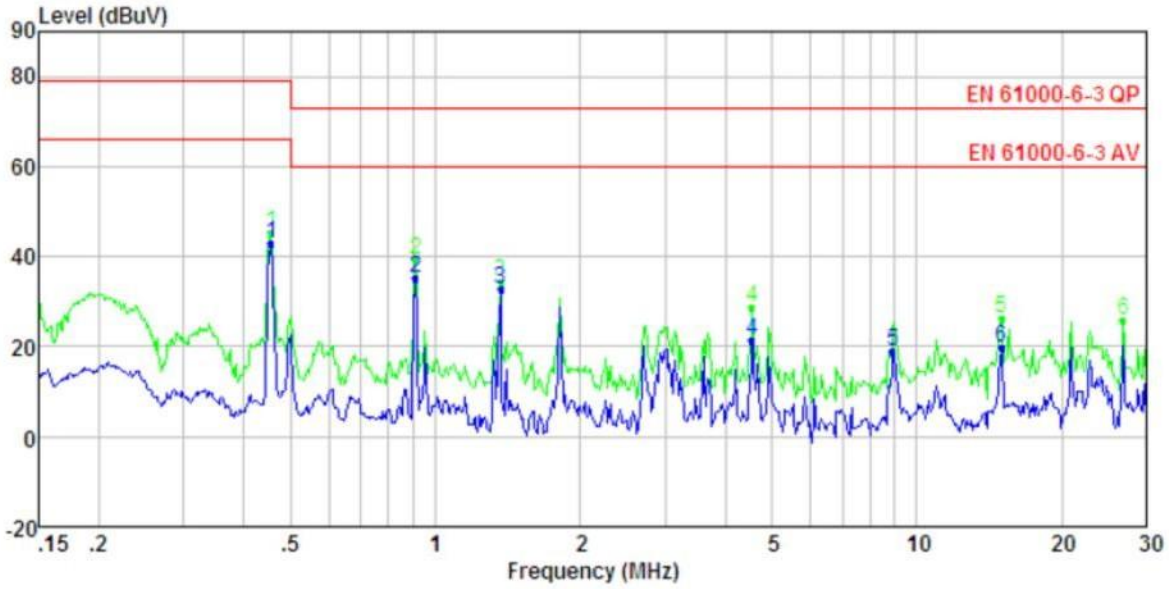


	Freq	Level	Margin	Limit	Reading	Correct	Remark
	MHz	dBu/m	dB	(dBuA/m)	(dBuA/m)	Factor(dB)	
1	48.4300	15.19	-24.81	40.00	4.94	9.69	
2	80.4400	14.25	-25.75	40.00	-0.98	15.92	
3	92.0800	15.79	-24.21	40.00	-0.87	18.32	
4	168.7100	15.48	-24.52	40.00	3.16	12.56	
5	208.4800	17.36	-22.64	40.00	0.97	16.33	
6	292.8700	18.27	-28.73	47.00	3.12	14.99	

Note: '*' means the disturbance power level 20dB lower than the relevant limit.

QP Level = QP Reading + Cable Loss


APPENDIX II

EUT:	Lithium iron phosphate battery	Model No.:	JA-LF51.2V410AH
Temperature:	24.3℃	Relative Humidity:	58%
Test Power:	*51.2V,200A,410Ah*	Test Result:	Pass
Test Mode:	ON		

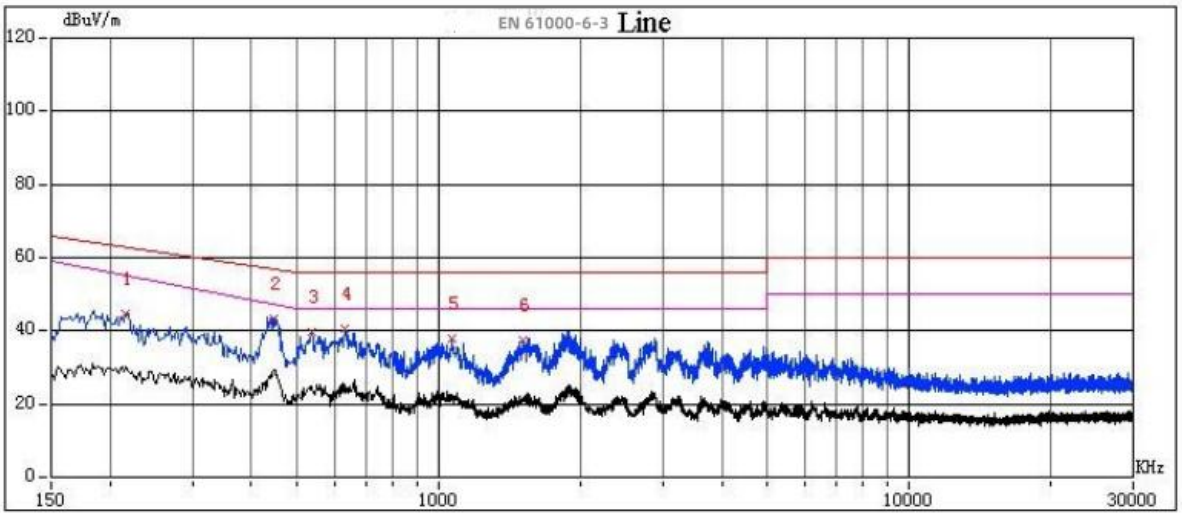

No.	Fheq(KTz)	Peak Amptd(dBuV)	QP Amptd(dBuV)	Avg Amptd(dBuV)	QP Limt(dBuV)	Avg Limt(dBuV)	QP Mrgi(dB)	Avg Margin(dB)	Futon(dB)
1	216.600	43.24	---	---	64.30	56.63	-21.05	-11.87	11.57
2	447.850	40.11	---	---	57.32	47.45	-17.21	-4.60	11.41
3	538.500	38.55	---	---	56.00	46.00	-17.45	-6.41	11.89
4	631.000	39.77	---	---	56.00	46.00	-16.23	-5.40	12.33
5	1065.750	36.68	---	---	56.00	46.00	-19.31	-8.17	12.20
6	1507.900	32.34	---	---	56.00	46.00	-23.65	-8.40	12.40

EUT:	Lithium iron phosphate battery	Model No.:	JA-LF51.2V410AH
Temperature:	24.3℃	Relative Humidity:	58%
Test Power:	*51.2V,200A,410Ah*	Test Result:	Pass
Test Mode:	ON		

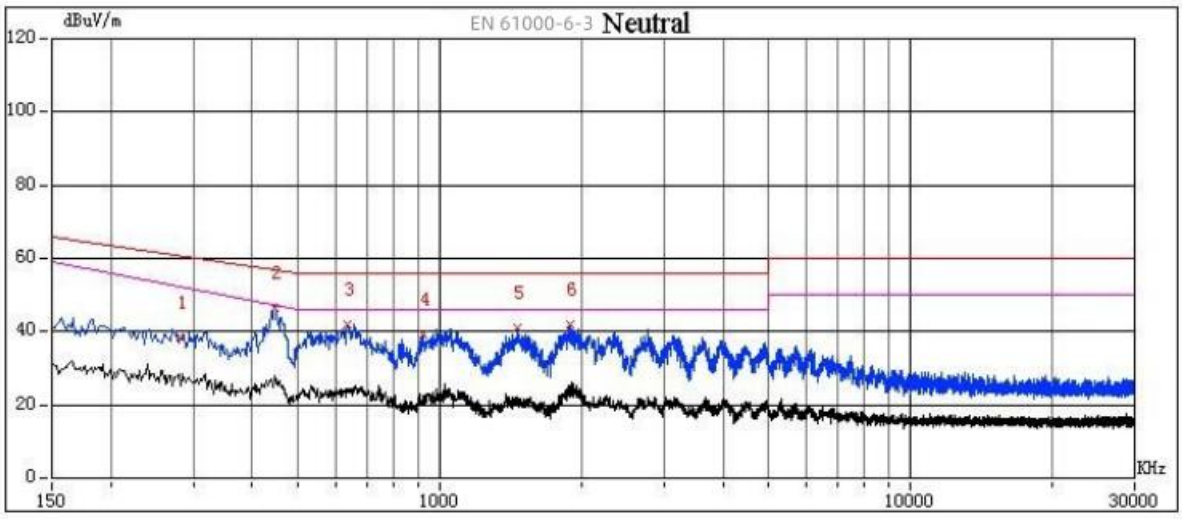

No.	Freq(KHx	Peak Amptd(dEuV)	QP Amptd(dEuV)	vg Amptd(dEuV)	QP Limt(dEuV)	Avg Lim+(dBuV)	QP Margin(dB)	Avg rzh(dE)	Fastan(dE)
1	281.350	39.68	---	---	62.81	54.70	-23.13	-15.83	12.20
2	446.000	45.24	---	---	57.25	48.84	-12.01	-1.33	11.55
3	634.700	40.15	---	---	56.00	46.00	-15.84	-3.55	12.33
4	919.600	41.33	---	---	56.00	46.00	-14.67	-6.60	12.22
5	1461.650	40.29	---	---	56.00	46.00	-15.72	-4.98	12.37
6	1901.950	42.22	---	---	56.00	46.00	-13.78	-4.25	12.67

********END OF REPORT********

eXX2dTq NHDtaj8